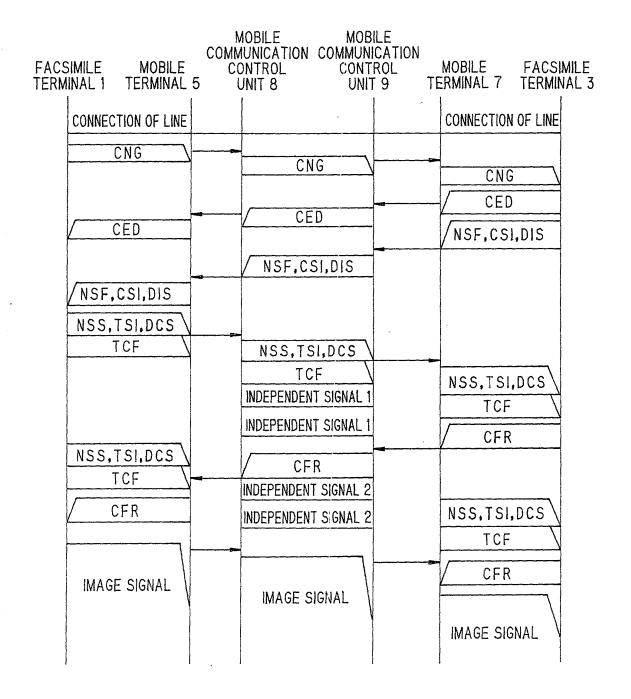
The state of the s

2/13 F/G.2




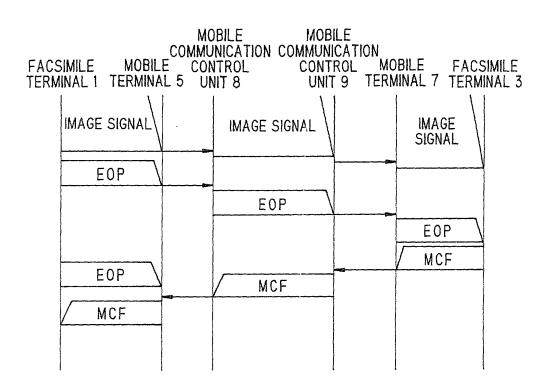


FIG.4

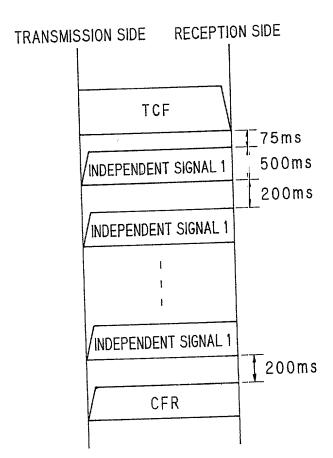

F/G.5



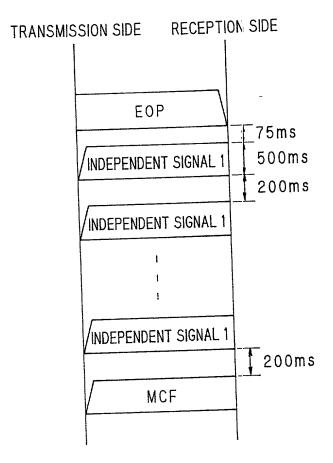


FIG.6

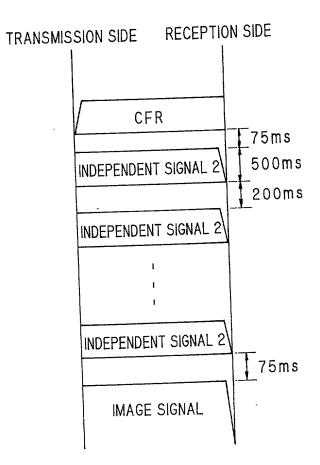


and the state of t

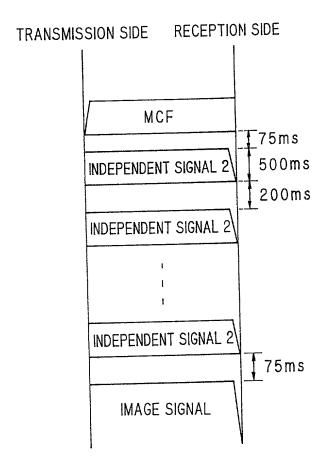


III Mitaeri


8/13


F16.9

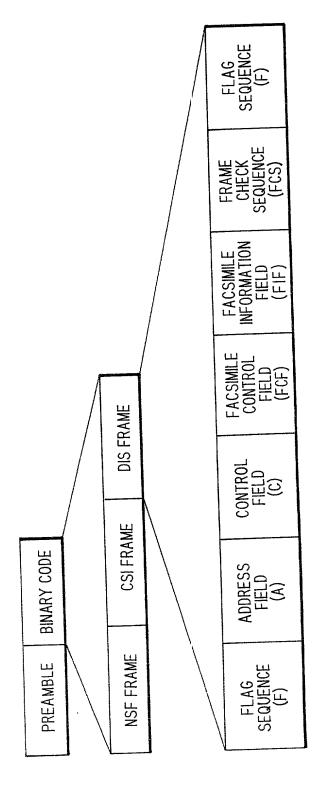

The title against t

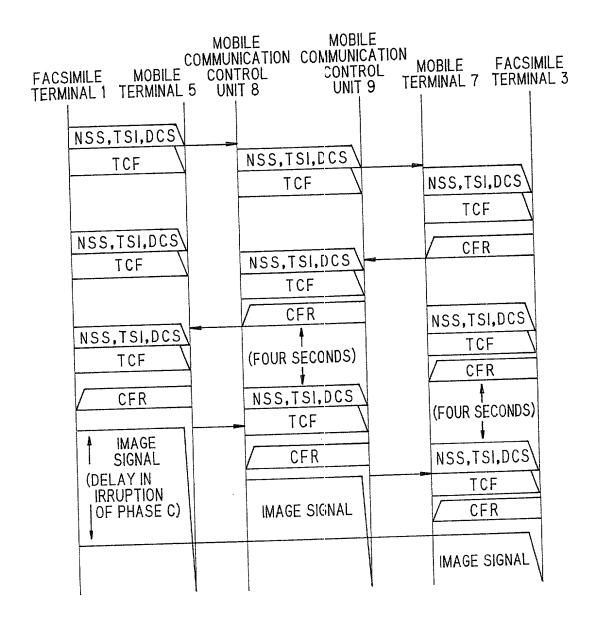

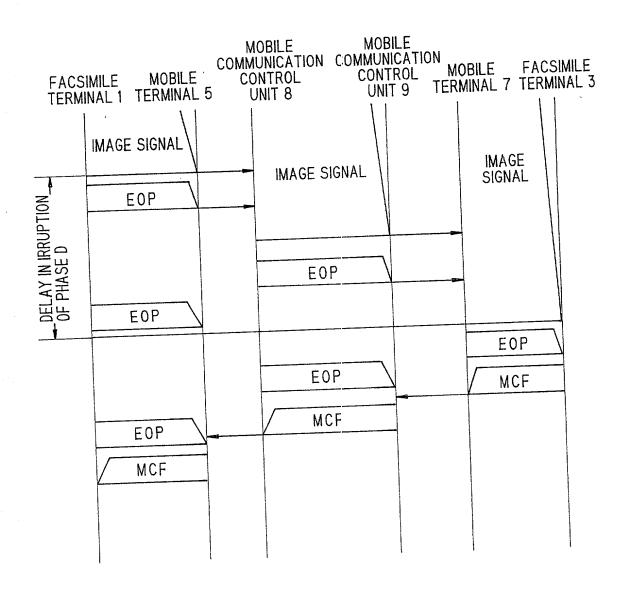

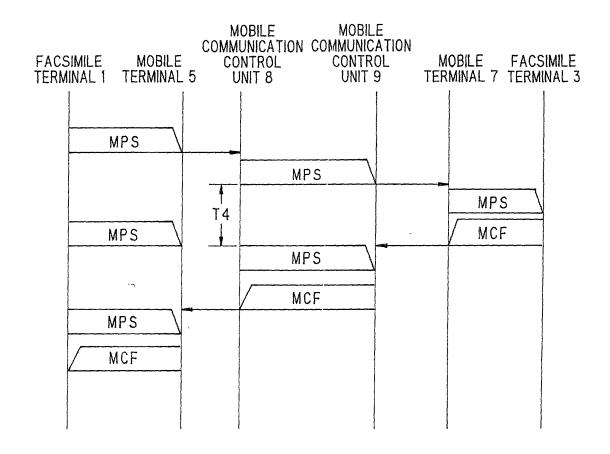

F/G.13

BREVITY CODE	NAME OF SIGNAL	FULL SPELLING	FACILITIES
CFR	CONFIRMATION TO RECEIVE SIGNAL	Confirmation to Receive	RESPONSE SIGNAL TO INDICATE APPROVE OF STARTING TO DELIVER MESSAGE AFTER COMPLETING PROCEDURE PRIOR TO MESSAGE DELIVERY
CSI	CALLED SUBSCRIBER IDENTIFICATION SIGNAL	Called Subscriber Identification	NUMBER OF CALLED SUBSCRIBER
DCN	DISCONNECTION COMMAND	Disconnect	INDICATING START OF PHASE E
DCS	DIGITAL COMMAND SIGNAL	Digital Command Signal	COMMAND SIGNAL INDICATING FACILITIES SET UP AMONG STANDARD FACILITIES DESIGNATED BY DIS SIGNAL
DIS	DIGITAL IDENTIFICATION SIGNAL	Digital Identification Signal	INDICATING THAT CALLED SUBSCRIBER HAS RECEPTION FACILITIES BASED ON ITU-T STANDARD
EOP	END OF PROCEDURE SIGNAL	End of Procedure	INDICATING THAT THERE IS NO TRANS- MITTING DOCUMENT (GOING ON PHASE E)
MCF	MESSAGE CONFIRMATION SIGNAL	Message Confirmation	INDICATING THAT MESSAGE WAS COMPLETELY RECEIVED
MPS	MULTIPAGE SIGNAL	Multipage Signal	INDICATING COMPLETION OF PAGE FOR FACSIMILE MESSAGE (PROCEDURE RETURNS TO STARTING OF PHASE C)
NSF	NON-STANDARD FACILITIES IDENTIFICATION SIGNAL	Non-Standard Facilities	FOR IDENTIFYING DEMAND OF SPECIFIC USER OTHER THAN THAT OF ITU-T RECOMMENDATION
NSS	NON-STANDARD FACILITIES SET-UP SIGNAL	Non-Standard Facilities Set-up	COMMAND SIGNAL INDICATING FACILITIES USED ACTUALLY IN COMMUNICATION AMONG NON-STANDARD FACILITIES
RNR	RECEIVE NOT READY SIGNAL	Receive Not Ready	INDICATING THAT NO MORE DATA CANNOT RECEIVED BY RECEPTION SIDE
TCF	TRAINING CHECK SIGNAL	Training Check	CONFIRMING TRAINING OF MODEM BY WHICH FACSIMILE MESSAGE IS RECEIVED, AND CHECKING WHETHER CHANNEL CAN BE USED AT THIS TRANSMISSION RATE
TSI	TRANSMITTING SUBSCRIBER IDENTIFICATION SIGNAL	Transmitting Subscriber Identification	NUMBER OF TRANSMITTING SUB- SCRIBER
CRP	COMMAND REPEAT SIGNAL	Command Repeat	SINCE PRIOR COMMAND WAS ERRO- NEOUSLY RECEIVED, REPEAT OF ALL COMMANDS IS REQUESTED